



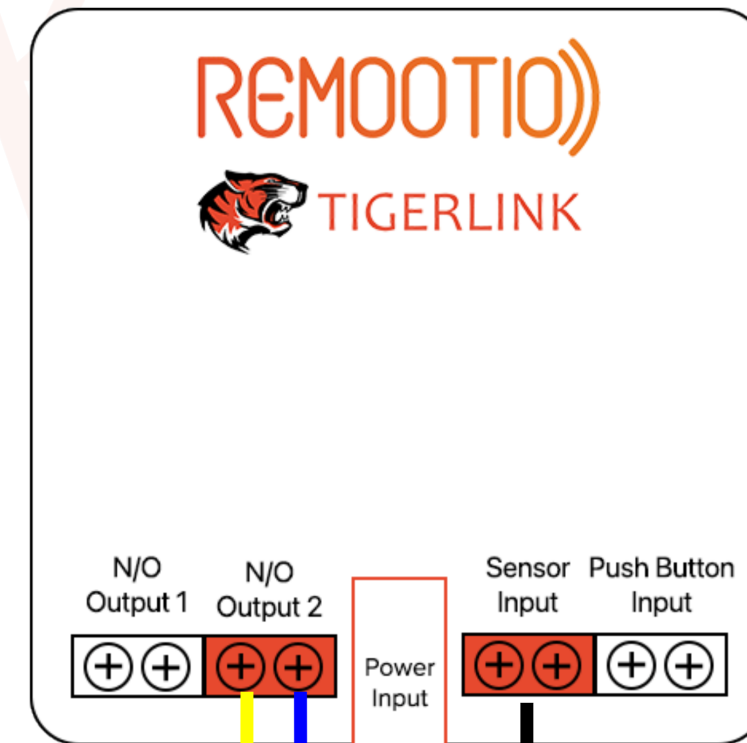

Closed position
Distance between sensors
max. 15mm

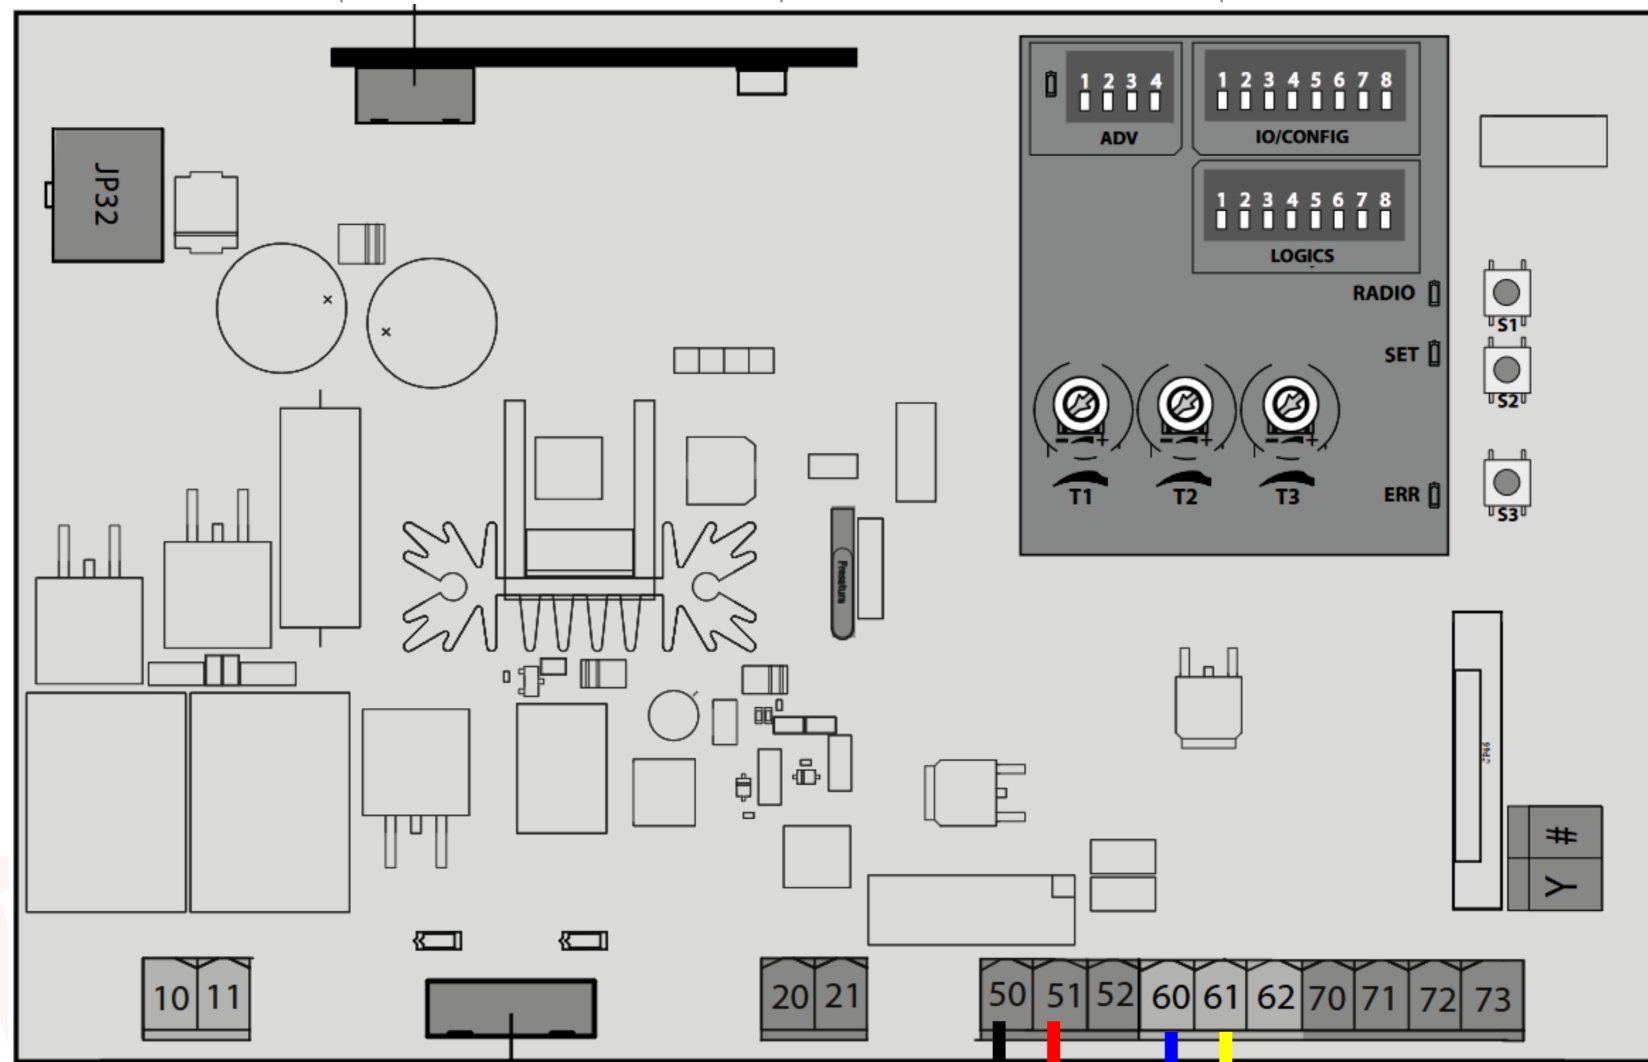


15 mm

Open position
Distance between sensors
min. 25mm



25 mm

*Cut and strip power cord

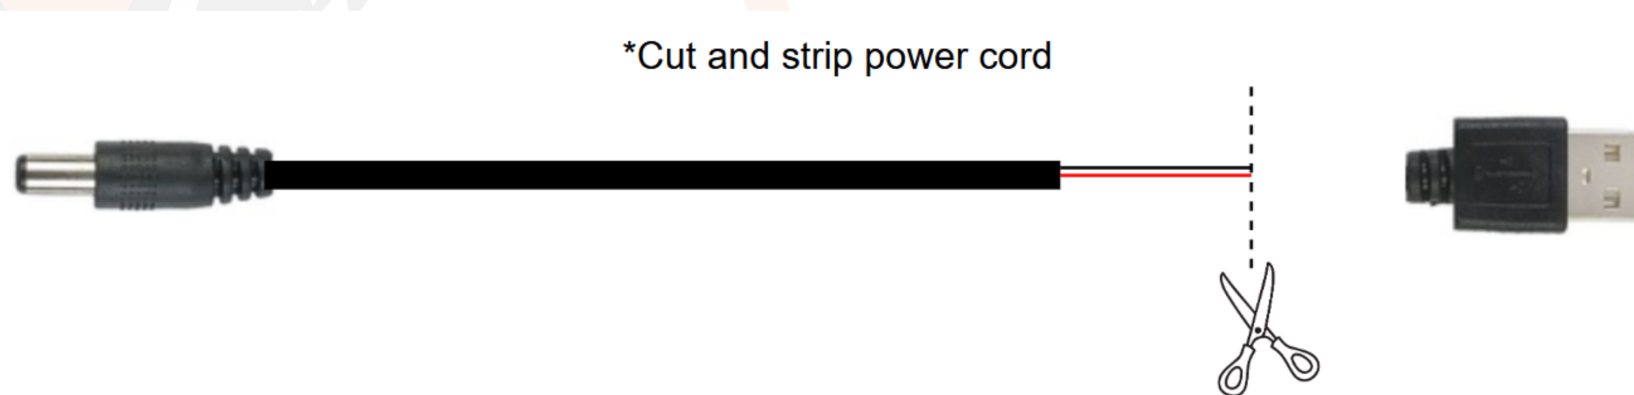

NOTES

1. Ensure power is disconnected before making or altering wiring connection.
2. Confirm polarity before first power-on.
3. All electrical wiring must be installed by a licensed electrician in accordance with local regulations.
4. Tigerlink is not responsible for any errors, damage, injury, or loss resulting from improper installation or incorrect wiring.

WIRE COLOR LEGEND

- Positive 24V dc
- Negative
- Signal
- Common



TIGERLINK

PRODUCT / ASSEMBLY:

BT B400/600 & Remootio 3

DRAWING NO.

WD-0009

REV.

A

SHEET

1 OF 1

DRAWN BY

J.W.

CHECKED BY

J.W.

DATE

18-09-2026