



MLW

GATE KEEPER 1

PRODUCT CODE: GC036

DESCRIPTION: Screw Fix Gate Closing Strut

OVERVIEW


This gas strut screw-fixed gate closer is an excellent choice for gates up to 75kg, offering reliable operation and ease of installation with adjustable brackets. Its screw-fixed design ensures secure attachment, providing peace of mind in gate safety and functionality. Ideal for various gate types, this closer helps ensure smooth, controlled closing while minimizing wear and tear.

SPECIFICATIONS

MAX GATE SIZE	2000mm (H) x 1250mm (W)
MAX GATE WEIGHT	85kgs
CONNECTORS	M10 Elbow Joints
COLOUR	Black
DIMENSIONS End to End	810mm
DIMENSIONS (Rod Only)	740mm
STROKE LENGTH	445mm
FORCE	250N

INSTALLATION

1. To install the gas strut, first fix the brackets in position relative to the hinge center.
2. Next, with the gate closed, secure the strut to the slotted and long brackets using the provided shakeproof washers and nuts, positioning the washers as shown; to adjust the force exerted on the gate, reposition the strut along the long bracket.
3. If the gate can open beyond 90°, it's advisable to fit a stop to prevent potential damage to the strut.
4. For maintenance, avoid lubricating or damaging the piston rod, which is protected by a steel cover tube, to preserve seal life; periodically lubricate the ball joints with light oil and clean the gas strut surface with a damp cloth.

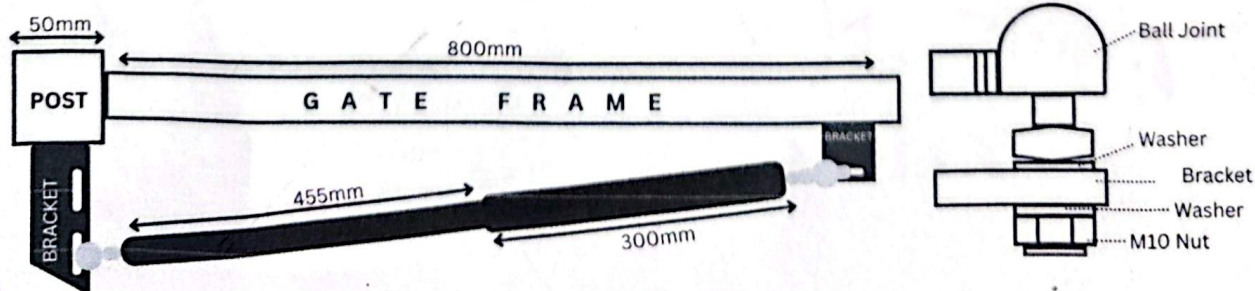

www.melbournelaserworks.com.au

PH: (03) 7300 6980

Sales@melbournelaserworks.com.au